


郑州索信门业有限公司

Zhengzhou Suoxin Door Industry Co., Ltd.

DOOR INDUSTRY
DANTESI
硬质快卷门&快速门&工业门

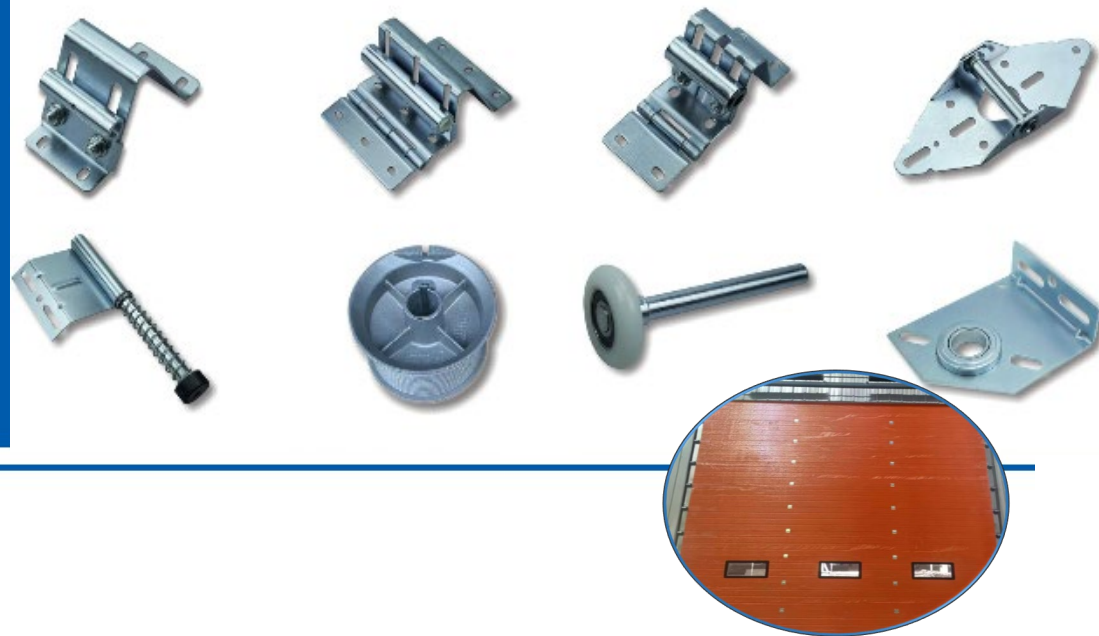

专业快速门制造商
Professional Fast Door Manufacturer

Roller series



BT-R001

6200轴承尼龙滚轮

材料: 尼龙, 碳钢
杆直径11mm,
杆长120mm
适用于2"轨道

Nylon Roller with 6200rs bearing

Material: Nylon, carbon steel
Rod diameter 11mm,
length 120mm
Suitable for 2" track



BT-R002

11球尼龙滚轮

材料: 尼龙, 碳钢
杆直径11mm,
杆长120mm
适用于2"轨道

Nylon Roller with 11 ball

Material: Nylon, carbon steel
Rod diameter 11mm,
length 120mm
Suitable for 2" track



BT-R003

黑色轴承尼龙滚轮

材料: 尼龙, 碳钢
杆直径11mm,
杆长120mm&195mm
适用于2"轨道

Black Nylon Roller with bearing

Material: Nylon, carbon steel
Rod diameter 11mm,
length 120mm&195mm
Suitable for 2" track



BT-R004

紫色轴承尼龙滚轮

材料: 尼龙, 碳钢
杆直径11mm,
杆长120mm
适用于2"轨道

Purple Nylon Roller with bearing

Material: Nylon, carbon steel
Rod diameter 11mm,
length 120mm
Suitable for 2" track



BT-R005

蓝色轴承尼龙滚轮

材料: 尼龙, 碳钢
杆直径11mm,
杆长120mm
适用于2"轨道

Blue Nylon Roller with bearing

Material: Nylon, carbon steel
Rod diameter 11mm,
length 120mm
Suitable for 2" track



BT-R006

黄色轴承尼龙滚轮

材料: 尼龙, 碳钢
杆直径11mm,
杆长120mm
适用于2"轨道

Yellow Nylon Roller with bearing

Material: Nylon, carbon steel
Rod diameter 11mm,
length 120mm
Suitable for 2" track



BT-R007

防尘静音尼龙滚轮

材料: 尼龙, 碳钢
杆直径11mm,
杆长120mm
适用于2"轨道

Mute Nylon Roller with cover

Material: Nylon, carbon steel
Rod diameter 11mm,
length 120mm
Suitable for 2" track



BT-R008

不锈钢尼龙滚轮

材料: 尼龙, 不锈钢
杆直径11mm,
杆长120mm
适用于2"轨道

Stainless steel Nylon Roller

Material: Nylon, stainless steel
Rod diameter 11mm,
length 120mm
Suitable for 2" track



BT-R009

黑色轴承尼龙滚轮

材料: 尼龙, 碳钢
杆直径11mm,
杆长120mm&195mm
适用于2.5"轨道

Black Nylon Roller with bearing

Material: Nylon, carbon steel
Rod diameter 11mm,
length 120mm&195mm
Suitable for 2.5" track



BT-R010

无滚珠尼龙轮

材料: 尼龙, 碳钢
杆直径11mm,
杆长120mm
适用于2"轨道

Nylon Roller without ball

Material: Nylon, carbon steel
Rod diameter 11mm,
length 120mm
Suitable for 2" track



BT-R011

快速门滚轮

材料: 尼龙, 碳钢
杆直径10mm,
杆长130mm
适用于快速卷门

Quick rolling door roller

Material: Nylon, carbon steel
Rod diameter 10mm,
length 130mm
Suitable for quick rolling door



BT-R012

快速门滚轮

材料: 尼龙, 碳钢
杆直径10mm,
杆长130mm
适用于快速卷门

Quick rolling door roller

Material: Nylon, carbon steel
Rod diameter 10mm,
length 130mm
Suitable for quick rolling door



BT-R013

6200轴承尼龙滚轮

材料: 尼龙, 碳钢
杆直径11mm,
杆长195mm
适用于2"轨道

Nylon Roller with 6200rs bearing

Material: Nylon, carbon steel
Rod diameter 11mm,
length 195mm
Suitable for 2" track



BT-R014

11球尼龙滚轮

材料: 尼龙, 碳钢
杆直径11mm,
杆长195mm
适用于2"轨道

Nylon Roller with 11 ball

Material: Nylon, carbon steel
Rod diameter 11mm,
length 195mm
Suitable for 2" track



BT-R015

防尘静音尼龙滚轮

材料: 尼龙, 碳钢
杆直径11mm,
杆长170mm
适用于2"轨道

Mute Nylon Roller with cover

Material: Nylon, carbon steel
Rod diameter 11mm,
length 170mm
Suitable for 2" track



BT-R016

铁滚轮

材料: 碳钢, 镀锌
杆直径11mm,
杆长195mm&120mm
适用于2"轨道

Steel Roller

Material: Carbon steel, zinc plated
Rod diameter 11mm,
length 195mm&120mm
Suitable for 2" track



BT-R017

黑色轴承尼龙滚轮

材料: 尼龙, 碳钢
杆直径11mm,
杆长195mm
适用于3"轨道

Black Nylon Roller with bearing

Material: Nylon, carbon steel
Rod diameter 11mm,
length 195mm
Suitable for 3" track



BT-R018

铁滚轮

材料: 碳钢, 镀锌
杆直径11mm,
杆长195mm
适用于3"轨道

Steel Roller

Material: Carbon steel, zinc plated
Rod diameter 11mm, length 195mm
Suitable for 3" track

Hinge series



BT-H019

中心合页

厚度: 2.0&2.3&2.5mm
表面: 镀锌

Center Hinge

Thickness:2.0&2.3&2.5mm
Finish:Galvanized



BT-H020

中心合页

厚度: 2.0&2.3&2.5mm
表面: 镀锌

Center Hinge

Thickness:2.0&2.3&2.5mm
Finish:Galvanized



BT-H021

中心合页

厚度: 2.5mm
表面: 镀锌

Center Hinge

Thickness:2.5mm
Finish:Galvanized



BT-H022

中心合页

厚度: 2.0&2.3&2.5mm
表面: 镀锌

Center Hinge

Thickness:2.0&2.3&2.5mm
Finish:Galvanized



BT-H023

中心合页

厚度: 2.0&2.3&2.5mm
表面: 镀锌

Center Hinge

Thickness:2.0&2.3&2.5mm
Finish:Galvanized



BT-H024

中心合页

厚度: 2.3mm,70宽
表面: 镀锌

Center Hinge

Thickness:2.3mm,width 70
Finish:Galvanized



BT-H025

中心合页

厚度: 2.0mm
材料: 304不锈钢

Center Hinge

Thickness:2.0mm
Material:304 Stainless steel



BT-H026

中心合页

厚度: 2.5mm
表面: 镀锌

Center Hinge

Thickness:2.5mm,
width 90mm
Finish:Galvanized



BT-H027

中心合页

厚度: 2.5mm
表面: 镀锌

Center Hinge

Thickness:2.5mm
Finish:Galvanized



BT-H028

消音边合页

厚度: 2.0&2.3&2.5mm
表面: 镀锌

Mute Side Hinge

Thickness:2.0&2.3&2.5mm
Finish:Galvanized



BT-H029

消音边合页

厚度: 2.0&2.3&2.5mm
表面: 镀锌

Mute Side Hinge

Thickness:2.0&2.3&2.5mm
Finish:Galvanized



BT-H030

消音边合页

厚度: 2.0&2.3&2.5mm
表面: 镀锌

Mute Side Hinge

Thickness:2.0&2.3&2.5mm
Finish:Galvanized



BT-H031

边合页

厚度: 2.3mm
表面: 镀锌

Side Hinge

Thickness:2.3mm
Finish:Galvanized



BT-H032

铝合金边合页

厚度: 4.8mm
材料: 铝

Aluminum Side Hinge

Thickness:4.8mm
Material:aluminum



BT-H033

铝合金边合页

厚度: 4.8mm
材料: 铝

Aluminum Side Hinge

Thickness:4.8mm
Material:aluminum



BT-H034

边合页

厚度: 2.0&2.3&2.5mm
表面: 镀锌

Side Hinge

Thickness:2.0&2.3&2.5mm
Finish:Galvanized



BT-H035

0#合页

厚度: 1.8mm
表面: 镀锌

14Ga 0# Hinge

Thickness:1.8mm
Finish:Galvanized



BT-H036

1#合页

厚度: 1.8mm
表面: 镀锌

14Ga 1# Hinge

Thickness:1.8mm
Finish:Galvanized

Hinge series



BT-H037

2#合页

厚度: 1.8mm

表面: 镀锌

14Ga 2# Hinge

Thickness:1.8mm

Finish:Galvanized



BT-H038

3#合页

厚度: 1.8mm

表面: 镀锌

14Ga 3# Hinge

Thickness:1.8mm

Finish:Galvanized



BT-H039

4#合页

厚度: 1.8mm

表面: 镀锌

14Ga 4# Hinge

Thickness:1.8mm

Finish:Galvanized



BT-H040

5#合页

厚度: 1.8mm

表面: 镀锌

14Ga 5# Hinge

Thickness:1.8mm

Finish:Galvanized



BT-H041

6#合页

厚度: 1.8mm

表面: 镀锌

14Ga 6# Hinge

Thickness:1.8mm

Finish:Galvanized



BT-H042

双排静音边合页

厚度: 2.5mm,120宽

表面: 镀锌

Industrial mute side hinge

Thickness:2.5mm,
width 120mm

Finish:Galvanized



BT-H043

双排静音边合页

厚度: 2.5mm,120宽

表面: 镀锌

Industrial mute side hinge

Thickness:2.5mm,
width 120mm

Finish:Galvanized



BT-H044

双排静音边合页

厚度: 2.5mm,120宽

表面: 镀锌

Industrial mute side hinge

Thickness:2.5mm,
width 120mm

Finish:Galvanized



BT-H045

双排静音边合页

厚度: 2.5mm,130宽

表面: 镀锌

Industrial mute side hinge

Thickness:2.5mm,
width 130mm

Finish:Galvanized



BT-H046

双排静音边合页

厚度: 2.5mm,130宽

表面: 镀锌

Industrial mute top bracket

Thickness:2.5mm,
width 130mm

Finish:Galvanized



BT-H047

双排静音边合页

厚度: 2.5mm,130宽

表面: 镀锌

Industrial mute side hinge

Thickness:2.5mm,
width 130mm

Finish:Galvanized



BT-H048

双排静音边合页

厚度: 2.5mm,130宽

表面: 镀锌

Industrial mute side hinge

Thickness:2.5mm,
width 130mm

Finish:Galvanized



BT-H049

双排边合页

厚度: 2.5mm,150宽

表面: 镀锌

Industrial side hinge

Thickness:2.5mm,
width 150mm

Finish:Galvanized



BT-H050

双排边合页

厚度: 2.5mm,150宽

表面: 镀锌

Industrial side hinge

Thickness:2.5mm,
width 150mm

Finish:Galvanized

Hinge series

Bracket series



BT-B051

双排顶轮架

厚度: 2.5mm, 150宽
表面: 镀锌

Industrial Top bracket

Thickness: 2.5mm,
Width 150mm
Finish: Galvanized



BT-B052

双排消音顶轮架

厚度: 2.5mm, 120宽
表面: 镀锌

Industrial Mute Top bracket

Thickness: 2.5mm,
Width 120mm
Finish: Galvanized



BT-B053

民用顶轮架

厚度: 1.5mm
表面: 镀锌

Residential Top bracket

Thickness: 1.5mm
Finish: Galvanized



BT-B054

顶轮架

厚度: 2.0&2.3&2.5mm
表面: 镀锌

Top bracket

Thickness: 2.0&2.3&2.5mm
Finish: Galvanized



BT-B055

消音顶轮架

厚度: 2.0&2.3&2.5mm
表面: 镀锌

Mute Top bracket

Thickness: 2.0&2.3&2.5mm
Finish: Galvanized



BT-B056

顶轮架

厚度: 2.3mm
表面: 镀锌

Top bracket

Thickness: 2.3mm
Finish: Galvanized



BT-B057

顶轮架

厚度: 2.0&2.3&2.5mm
表面: 镀锌

Top bracket

Thickness: 2.0&2.3&2.5mm
Finish: Galvanized



BT-B058

双轨顶轮架

厚度: 2.0&2.5mm
表面: 镀锌

Residential Top Bracket

Thickness: 2.0&2.5mm
Finish: Galvanized



BT-B059

可调底轮架

厚度: 2.5mm
表面: 镀锌

Adjustable Bottom Bracket

Thickness: 2.5mm
Finish: Galvanized



BT-B060

铝可调底轮架

厚度: 4.0mm
材料: 铝合金

Aluminum Bottom Bracket

Thickness: 4.0mm
Material: Aluminum



BT-B061

民用底轮架

厚度: 2.5mm
表面: 镀锌

Residential Bottom Bracket

Thickness: 2.5mm
Finish: Galvanized



BT-B062

民用轴承支架

厚度: 2.5mm, 镀锌
中心距: 67mm

Residential Bearing Bracket

Thickness: 2.5mm,
Galvanized
Bearing Center
distance: 67mm



BT-B063

民用轴承支架

厚度: 2.5mm, 镀锌
中心距 85mm

Residential Bearing Bracket

Thickness: 2.5mm,
Galvanized
Bearing Center
distance: 85mm



BT-B064

民用轴承支架

厚度: 2.5mm, 镀锌
中心距 85mm

Residential Bearing Bracket

Thickness: 2.5mm,
Galvanized
Bearing Center
distance: 85mm




BT-B065

左右轴承支架

厚度: 2.5mm, 镀锌
直板到轴中心距离: 85

Left & Right Bearing Bracket

Thickness: 2.5mm,
Galvanized
Bearing Center
distance: 85mm



BT-B066

工业轴承支架

厚度: 4.0mm, 镀锌
直板到轴中心距离有: 85,
110, 123, 148, 185mm

Industrial Bearing Bracket

Thickness: 2.5mm, Galvanized
Bearing Center distance: 85,
, 110, 123, 148, 185mm



BT-B066S

工业轴承支架

厚度: 4.0mm, 镀锌
直板到轴中心距离有: 85,
110, 123, 148, 185mm

Industrial Bearing Bracket

Thickness: 2.5mm, Galvanized
Bearing Center distance: 85,
, 110, 123, 148, 185mm



BT-B067

工业轴承支架

厚度: 4.0mm, 镀锌
直板到轴中心距离: 150mm

Industrial Bearing Bracket

Thickness: 2.5mm,
Galvanized
Bearing Center
distance: 150mm

Bracket series

Bracket series



BT-B068

扭簧防断调节支架

厚度:4.0mm

表面:镀锌

Spring Break Protection

Adjust Bracket

Thickness: 2.5mm

Finish:Galvanized



BT-B069

外弹簧中心支架

厚度:2.5mm

表面:镀锌

Spring Center Bracket

Thickness: 2.5mm

Finish:Galvanized



BT-B070

助推器调节板


厚度:4.0mm

表面:镀锌

Pusher Adjustable Plate

Thickness: 4.0mm

Finish:Galvanized



BT-B071

2"安全底部支架 (不可调)

适用于2英寸轨道,

11mm柄滚轮


表面:镀锌

2" Safe Bottom Bracket (unadjustable)

Suitable for 2" track,

11mm roller shaft

Finish:Galvanized



BT-B072

2"安全底部支架 (可调)

适用于2英寸轨道,

11mm柄滚轮

表面:镀锌

2" Safe Bottom Bracket (adjustable)

Suitable for 2" track,

11mm roller shaft

Finish:Galvanized



BT-B073

3"安全底部支架 (不可调)

适用于3英寸轨道,

11mm柄滚轮

表面:镀锌

3" Safe Bottom Bracket (unadjustable)

Suitable for 3" track,

11mm roller shaft

Finish:Galvanized



BT-B074

民用安全底部支架

适用于2英寸轨道, 11mm柄滚轮


表面:镀锌

Residential 2" Safe Bottom Bracket

Suitable for 2" track, 11mm

roller shaft

Finish:Galvanized



BT-B072B

3"安全底部支架 (可调)

适用于3英寸轨道,

11mm柄滚轮

表面:镀锌

3" Safe Bottom Bracket (adjustable)

Suitable for 3" track,

11mm roller shaft

Finish:Galvanized



BT-B072C

3"安全底部支架 (可调)

适用于3英寸轨道,

11mm柄滚轮

表面:镀锌

3" Safe Bottom Bracket (adjustable)

Suitable for 3" track,

11mm roller shaft

Finish:Galvanized

Angle & track series



BT-A075

旗状角铁

厚度: 2.0mm, 含左右

表面:镀锌

Flag-shaped Joint Angle Iron

Thickness:2.0mm,

Both left and right

Finish:Galvanized



BT-A076

多孔角铁

厚度: 2.3mm, &2.5mm

表面:镀锌板

Joint Angle Iron

Thickness:2.3mm&2.5mm

Finish:Pre-galvanized



BT-A077

连接角铁


厚度: 2.3mm

表面:镀锌

Joint Angle Iron

Thickness:2.3mm& 2.5mm

Finish:Galvanized



BT-A078

工业连接角铁

厚度: 2.0mm

表面:镀锌

Industrial Joint Angle Iron

Thickness:2.0mm

Finish:Galvanized



BT-A079

侧面支架

厚度: 2.5mm

表面:镀锌,用于固定轨道

Side bracket

Thickness:2.5mm

Finish:Galvanized,

for fixing of track



BT-A080

双轨连接片

厚度: 1.5mm

表面:镀锌

Double Track Coupler

Thickness:1.5mm

Finish:Pre-Galvanized



BT-A081

平衡轴支架


厚度: 1.5mm

表面:镀锌

Balance System Bracket

Thickness:1.5mm

Finish:Pre-Galvanized



BT-A082

中置梁支架

厚度: 4.0mm

表面:镀锌

Beam Support Bracket

Thickness:4.0mm

Finish:Galvanized



BT-A083

带辅轨直轨

厚度: 2.0

表面:镀锌

Track

Thickness:2.0mm

Finish:Galvanized

Angle & track series



BT-A084

弯轨
厚度: 2.0
表面: 镀锌
Track
Thickness: 2.0mm
Finish: Galvanized




BT-A085

水平横梁
厚度: 2.0
表面: 镀锌
Cross Beam
Thickness: 2.0mm
Finish: Galvanized



BT-A086

侧封条
材料: PVC
Side seal
Material: PVC



BT-A087

底封条
材料: PVC
Bottom seal
Material: PVC



BT-A088

底封条
材料: EPDM
Bottom seal
Material: EPDM

Spring series



BT-SP089

工业门15寸助推器
厚度: 2.5mm, 镀锌
总长: 380mm
Industrial 15" Pusher Spring
Thickness: 2.5mm,
Galvanized
Total length: 15"



BT-SP090

工业门27寸助推器
厚度: 2.5mm, 镀锌
总长: 680mm
Industrial 27" Pusher Spring
Thickness: 2.5mm,
Galvanized
Total length: 27"



BT-SP091

小号车库门助推器
厚度: 2.5mm, 镀锌
适用于小门助推
Small Size Push Spring
Thickness: 2.5mm,
Galvanized
Suit for small door pusher



BT-SP092

小号车库门助推器
厚度: 2.5mm, 镀锌
适用于小门助推
Small Size Push Spring
Thickness: 2.5mm,
Galvanized
Suit for small door pusher



BT-SP093

扭簧防断装置
1英寸内孔, 适用3-3/4接头
表面: 镀锌
Spring Break Protection
1" Bearing
use above 3 3/4" Spring fitting



BT-SP094

扭簧
内径: 50mm, 镀锌&防锈油
钢丝直径: 5.0-6.8mm
Spring
Inside diameter: 2"
Diameter of spring: 5.0-6.8mm
Finish: Anti-rust oil &
Galvanized



BT-SP095

扭簧
内径: 65mm, 镀锌&防锈油
钢丝直径: 6.5-8.0mm
Spring
Inside diameter: 2 5/8"
Diameter of spring: 6.5-8.0mm
Finish: Anti-rust oil &
Galvanized



BT-SP096


扭簧
内径: 93mm, 镀锌&防锈油
钢丝直径: 7.0-10mm
Spring
Inside diameter: 3 3/4"
Diameter of spring: 7.0-10mm
Finish: Anti-rust oil &
Galvanized



BT-SP097

扭簧
内径: 132mm, 镀锌&防锈油
钢丝直径: 7.0-10.5mm
Spring
Inside diameter: 5 1/4"
Diameter of spring: 7.0-10.5mm
Finish: Anti-rust oil &
Galvanized

Cable drum series



BT-D098

8"平轮

最大提升高度: 2440mm
运转时承载量: 240kg
适用于钢丝绳直径: 3.18mm
适用于25.4mm外径的轴杆

Drum 8FT

Maximum door height: 96"
Maximum door weight: 240kg
Maximum cable diameter: 1/8"
Diameter shaft: 1"




BT-D099

11"平轮

最大提升高度: 3352mm
运转时承载量: 260kg
适用于钢丝绳直径: 3.18mm
适用于25.4mm外径的轴杆

Drum 11FT

Maximum door height: 132"
Maximum door weight: 260kg
Maximum cable diameter: 1/8"
Diameter shaft: 1"




BT-D100

12"平轮

最大提升高度: 3650mm
运转时承载量: 340kg
适用于钢丝绳直径: 4mm
适用于25.4mm外径的轴杆

Drum 12FT

Maximum door height: 144"
Maximum door weight: 340kg
Maximum cable diameter: 5/32"
Diameter shaft: 1"



BT-D101

18"平轮

最大提升高度: 5500mm
运转时承载量: 680kg
适用于钢丝绳直径: 5mm
适用于25.4mm外径的轴杆

Drum 18FT

Maximum door height: 217"
Maximum door weight: 680kg
Maximum cable diameter: 3/16"
Diameter shaft: 1"



BT-D102

32"平轮

最大提升高度: 9750mm
运转时承载量: 700kg
适用于钢丝绳直径: 6mm
适用于25.4mm外径的轴杆

Drum 32FT

Maximum door height: 384"
Maximum door weight: 700kg
Maximum cable diameter: 1/4"
Diameter shaft: 1"



BT-D103

11塔轮

最大提升高度: 3350mm
运转时承载量: 500kg
适用于钢丝绳直径: 5mm
适用于25.4mm外径的轴杆

Drum 11VL

Maximum door height: 132"
Maximum door weight: 500kg
Maximum cable diameter: 3/16"
Diameter shaft: 1"



BT-D104

18塔轮

最大提升高度: 5480mm
运转时承载量: 500kg
适用于钢丝绳直径: 5mm
适用于25.4mm外径的轴杆

Drum 18VL

Maximum door height: 216"
Maximum door weight: 500kg
Maximum cable diameter: 3/16"
Diameter shaft: 1"



BT-D105

28塔轮

最大提升高度: 8540mm
运转时承载量: 750kg
适用于钢丝绳直径: 6mm
适用于25.4mm外径的轴杆

Drum 28VL

Maximum door height: 336"
Maximum door weight: 750kg
Maximum cable diameter: 1/4"
Diameter shaft: 1"



BT-D106

5-54半塔

垂直提升高度: 1370mm
最大提升高度: 6170mm
运转时承载量: 500kg
适用于钢丝绳直径: 5mm
适用于25.4mm外径的轴杆

Drum 5-54HL

Maximum hiliift: 54"
Maximum door height: 243"
Maximum door weight: 500kg
Maximum cable diameter: 3/16"
Diameter shaft: 1"



BT-D107

120半塔

垂直提升高度: 3050mm
最大提升高度: 6860mm
运转时承载量: 450kg
适用于钢丝绳直径: 5mm
适用于25.4mm外径的轴杆

Drum 120HL

Maximum hiliift: 120"
Maximum door height: 270"
Maximum door weight: 450kg
Maximum cable diameter: 3/16"
Diameter shaft: 1"



BT-D108

164半塔

垂直提升高度: 4165mm
最大提升高度: 10165mm
运转时承载量: 575kg
适用于钢丝绳直径: 6mm
适用于31.75mm外径的轴杆

Drum 164HL

Maximum hiliift: 164"
Maximum door height: 400"
Maximum door weight: 575kg
Maximum cable diameter: 1/4"
Diameter shaft: 1 1/4"



BT-D109

1-3/4"扭簧接头

适用于44mm内径的弹簧
适用于25.4mm外径的轴杆

Spring Fitting 1-3/4"

Suitable inner diameter: 1-3/4"
For shaft 1"



BT-D110

2"扭簧接头

适用于50mm内径的弹簧
适用于25.4mm外径的轴杆

Spring Fitting 2"

Suitable inner diameter: 2"
For shaft 1"



BT-D111

2-5/8"扭簧接头

适用于67mm内径的弹簧
适用于25.4mm外径的轴杆

Spring Fitting 2-5/8"

Suitable inner diameter: 2-5/8"
For shaft 1"



BT-D112

3-3/4"扭簧接头

适用于95mm内径的弹簧
适用于25.4mm外径的轴杆

Spring Fitting 3-3/4"

Suitable inner diameter: 3-3/4"
For shaft 1"



BT-D113

5-1/4"扭簧接头

适用于132mm内径的弹簧
适用于25.4mm外径的轴杆

Spring Fitting 5-1/4"

Suitable inner diameter: 5-1/4"
For shaft 1"



BT-D114

6"扭簧接头

适用于152mm内径的弹簧
适用于25.4mm外径的轴杆

Spring Fitting 6"

Suitable inner diameter: 6"
For shaft 1"

Shaft & Stick Series



BT-SH115

空心轴

厚度: 2.5mm&3.0mm
外径: 25.4mm

Hollow Shaft

Thickness: 2.5mm&3.0mm
Outside diameter: 1"



BT-SH116

实心轴

外径: 25.4mm

Solid Shaft

Outside diameter: 1"



BT-SH117

销子

尺寸: 6.35*6.35

适用于实心轴

Bend Key way

Size: 6.35mm*6.35mm
For solid shaft



BT-SH118

销子

尺寸: 6.35*9.35

适用于空心轴

Key way

Size: 6.35mm*9.35mm
For Hollow shaft



BT-SH119

联轴器

孔径: 25.4mm,

长度: 90mm

材料: 铝合金

Shaft Coupler

Inside diameter: 1"
Material: Aluminum



BT-SH120

联轴器

孔径: 25.4mm,

长度: 120mm

材料: 铝合金

Shaft Coupler

Inside diameter: 1",
Lenth: 120mm
Material: Aluminum



BT-SH121

联轴器

孔径: 25.4mm

表面: 镀锌

Shaft Coupler

Inside diameter: 1" & 1-1/4"
Finish: Galvanized



BT-SH122

限位套

孔径: 25.4mm

表面: 镀锌

Ferrule

Inside diameter: 1"
Finish: Galvanized

Handle & lock series



BT-L123

工业插销

底座厚度: 1.5mm,
插片厚度: 4.0mm
固定孔的中心距离: 103mm

Industrial Latch

Thickness of case: 1.5mm,
Thickness of bar: 4mm
The center line of the fixing
holes: 103mm



BT-L124

民用插销

底座厚度: 1.5mm,
插片厚度: 4.0mm
固定孔的中心距离: 83mm

Residential Latch

Thickness of case: 1.5mm,
Thickness of bar: 4mm
The center line of the fixing
holes: 83mm



BT-L125

工业插销

底座厚度: 2.0mm,
插片厚度: 4.0mm
表面: 镀锌

Industrial Latch

Thickness of case: 2.0mm,
Thickness of bar: 4mm
Finish: Galvanized



BT-L126

圆头把手

装配孔中心距离140mm

表面: 镀锌

Round Head Lift Handle

Mounting holes 5-1/2"
on centers
Finish: Galvanized



BT-L127

工业门提手

装配孔中心距离105mm

Industrial Black lift Handle

Mounting holes 105mm
on centers



BT-L128

车库门应急锁

适合4公分和5公分门板

表面: 镀铬

Emergency Lock

Suit for 4cm and 5cm door
Finish: Chrome plated



BT-L129

手动锁

包含锁芯, 面板, 锁盒, 螺丝
材料: 锁锌合金, 铜

Handle Lock

Incloude lock mechanism.
Autolatch. Striker. Swivel
latch. Wirerope. 85mm long
square shaft



BT-L130

门中门锁

包含锁芯, 面板, 锁盒, 螺丝
材料: 锁芯铜, 面板不锈钢

Door Lock in the Door

Incloude lock mechanism.
lock box. face-plate
Material: Copper, Stainless steel



BT131

4"滑轮
厚度: 1.8mm
表面: 镀锌
4" Pulley
Thickness:1.8mm
Finish:Galvanized



BT132

3"滑轮
厚度: 1.5mm
表面: 镀锌
3" Pulley
Thickness:1.5mm
Finish:Galvanized



BT133

钢丝绳
直径: 3.18mm,&4mm
&5mm&6mm
Cable
Diameter:1/8",
5/32,3/16",1/4"



BT134

底部钢丝滑轮
底座厚度: 3.75mm
表面: 镀锌
Bottom Pulley
Bracket Thickness:3.75mm
Finish:Galvanized



BT135

轴承
材料: 碳钢
内径: 25.4mm
Bearing
Material:carbon Steel
Inner diameter:1"



BT136

塑料轴承
材料: 塑料
内径: 25.4mm
Plastic Bearing
Material:Plastic
Inner diameter:1"



BT137

工业门小窗
尺寸: 660*220mm
开孔尺寸: 627*190mm
Windows
Size:660*220mm
Opening size:627*190mm



BT138

工业门小窗
尺寸: 650*320mm
开孔尺寸: 617*288
Windows
Size:650*320mm
Opening size:650*288mm



BT139

门板螺丝
规格: M6.35*20
Tapping screw for door panels
Size:1/4"-20



BT140

马车螺丝, 法兰螺母
规格: M10*20
Bolt
Size:3/8"*3/4"



BT141

轨道螺丝
规格: M6*16
Track Bolt
Size:1/4"*5/8"



BT142

塑料膨胀螺丝
规格: M8*50
Expansion screws
Size:5/16"*2"



BT143

塑料膨胀螺丝
规格: M8*80
Expansion screws
Size:5/16"*3 5/16"



BT144

滑轮夹板
Sheave fork



BT145

拉簧门配件
Extension spring door parts



BT146

4020葫芦
传动比: 4: 1
4020 Chain Hoist
Gear ratio:4:1



BT147


4006葫芦
传动比: 4: 1
4006 Chain Hoist
Gear ratio:4:1



BT148

间隙套,
尺寸: 12 X 19 X 21.5
Positioning sleeve
Size: 12 X 19 X 21.5mm

Spring

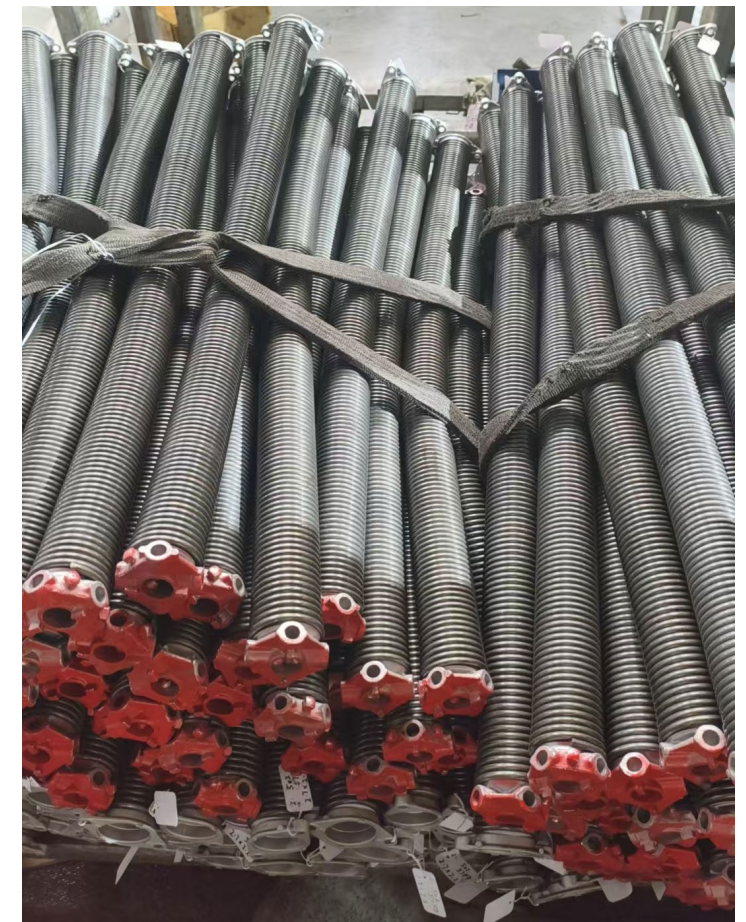

Spring

Various specifications and sizes can be customized

